


Technical specification – p.1 General data

Technical specification			
	Max. Patient weight, [kg]	165	
Load	Safe working load, [kg]	200	
	Lifting pole load, [kg]	80	
Dimensions	External (W x L x H), [cm]	101 x 214 x 86÷126	
	Mattress support platform (W x L), [cm]	90 x 200	
	Under bed clearance, [cm]	30	
Adjustment	Height, [cm]	40 ÷ 80	
	Angle – back rest section, [°]	0 ÷ 70	
	Angle – upper leg rest section, [°]	0 ÷ 35	
	Angle – lower leg rest section, [°]	0 ÷ 20	
	Comfort (reverse-Trendelenburg), [°]	0 ÷ 12	
Mattress	Dimensions (H x W x L), [cm]	90 x 200	
	Volume density of foamed material, [kg/m³]	35 – 50	
	Control Box	LINAK CA20	
	Lifting Hi-Lo Actuator	LINAK LA24	
	Back Rest / Leg Rest Actuator	LINAK LA24	
	Handset	LINAK HL74 Comfort	
Drive system	Input voltage	230V AC, 50Hz	
	Output voltage	24V DC	
	Power input	Max. 1A	
	Operating time	10%; 2 min ON / 18 min OFF	
	Ingress Protection	IP X6	
	Electrical appliance class	II	
	Noise level	< 65 dB (A)	
Castors	Model	Metal castors with total brake	
	Dimensions, [cm]	10	
Weight	Total, [kg]	85,6	
	Mat. support platform (Head End / Leg End), [kg]	16,6 / 16,2	
	End board with Hi-Lo Actuator (1 piece), [kg]	15,7	
	Back Rest / Leg Rest Actuator, [kg]	1,5 / 1,5	
	Handset, Control Box [kg]	0,3 / 0,6	
	Wooden Side rails (1 piece), [kg]	2,8	
	Lifting Pole with Triangle Handle, [kg]	5,3	
Operating / Storage/ Transport/ conditions	Working temperature, [°C]	+10 ÷ +40	
	Storage / Transport temperature, [°C]	-20 ÷ +50	
	Humidity, [%]	30 ÷ 75	

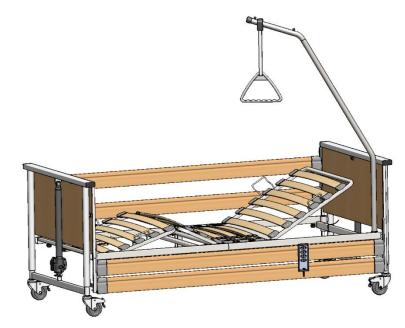

ATTENTION!

Measurement tolerance: $\pm 10 \text{ mm} / \pm 0.5 \text{ kg} / \pm 1.5^{\circ}$.

The technical data are valid in optimal ambient conditions for Beds in standard configuration, which have never been modified or damaged.

Safe Working Load is calculated according to EN 60601-2-52 standard, based on: Maximum Patient Weight = 140kg; Weight of mattress = 20kg;

Weight of accessories = 15kg

The maximum safe working load of the bed is 200kg.

The maximum patient weight depends on the total weight of accessories, e.g:

Max. Safe working load	Accessories weight (including mattress)	Max. Patient weight
200kg	35kg	165kg
200kg	20kg	180kg

△ WARNING

A risk assessment must be carried out before the bed is used by a patient (age, size, confition should be assessed) by a clinically qualified person.